BD - T Series - Micro Diaphragm Pump

Model:BD-05T033

Performance Data	
Model(for Standard)	BD-05T033
Voltage Range	6V/12V/24V
Maximum Flow	2-3L/min
Maximum negative pressure	-55KPa
Maximum positive pressure	90KPa
Motor Data	
Motor type	DC brushed motor
Max power	1.6W
Waterproof lever	IP00/IP40
Physical Properties	
Storage temperature	-40℃~60℃
Operating environment	-20℃~45℃
Material	
Pump head	PPS
Diaphragm/valve	EPDM
Pump body	Nylon
Dimension	50*24.5*41mm
Weight	79g



Features

Optimized pump body to ensure small volume, provide large flow and maintain relatively low power consumption.


Ø24,00


The gas flow is stable and the motor runs in a wide range.

- Low leakage rate and pollution-free sample gas
- Long lifetime:Dc brush motor: 2000-4000 hours

Drawing(mm)

3-ø2,50

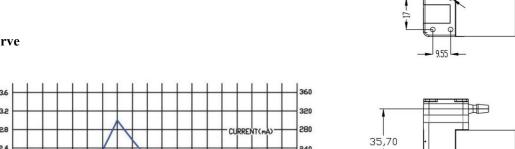



Curve

