

BD - 05TF Series - Micro Diaphragm Gas-Liquid Pump

Model:BD-05TF110W

Performance Data	
Model	BD-05TF110W
Voltage Option	6V/12/24V
Free Water Flow	110mL/min
Max Water Pressure	2.5bar
Water Pressure Head	>15m
Water Suction Head	7m
Free Gas Flow	3L/min
Max Gas Pressure	1bar
Max Gas Vacuum	-60kPa
Motor Data	
Motor Type	DC Brush Motor
Max Power	5W
Physical Properties	
Ambient Temperature	5°C~40°C
Fluid Temperature	10°C~60°C
Material/Other	
Hose Suggest	ID1.5mm, OD3mm
Head of pump	PA66
Diaphragm	EPDM
Valve	EPDM
Noise	55dB
Lifetime	3000H
Dimension	82.6x31.1x57.9mm
Weight	200g



Features

Oil-free, self-priming, gas-liquid compatible, low noise, dry-running capable, compact size, low vibration, long service life.


Principle

Driven by a motor, the diaphragm reciprocates to create suction and discharge cycles through check valves for stable gas and liquid transfer.

Chemical Resistance

Customizable PPS pump head, PTFE diaphragm, and FPM valves provide excellent resistance to corrosive gases and liquids.

Drawing(mm)

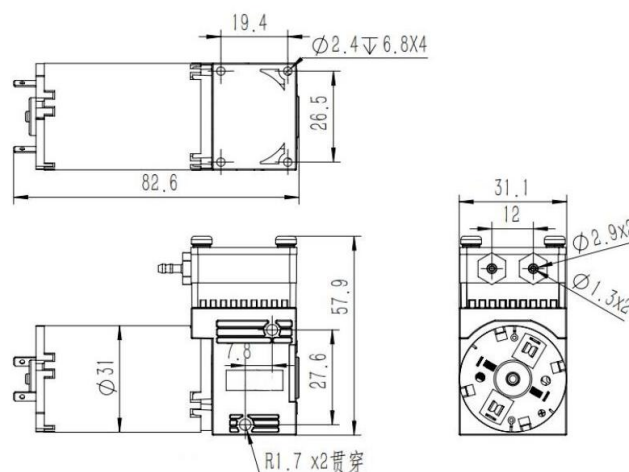

Installation & Usage Notes

1. Install a filter with a minimum filtration accuracy of $\leq 30 \mu\text{m}$ at the pump inlet to prevent particle ingress
2. Bottom mounting: $4 \times \varnothing 2.4$ mm holes (depth 6.8 mm), recommended to use M3 self-tapping screws for through-board fixation
3. Side mounting: $2 \times R1.7$ mm through holes, use M3 screws for through-board installation and secure fixation

Application Fields

- Digital printing equipment
- Biochemical analyzers
- Microplate washing equipment
- Chemical analysis systems
- Liquid sampling devices
- Cleaning & Disinfection