


BD - 05TF Series - Micro Diaphragm Gas-Liquid Pump

Model:BD-05TF480WB

Performance Data	
Model	BD-05TF480WB
Voltage Option	6V/12/24V
Free Water Flow	480mL/min
Max Water Pressure	2.5bar
Water Pressure Head	>15m
Water Suction Head	6m
Free Gas Flow	4L/min
Max Gas Pressure	80kPa
Max Gas Vacuum	-60kPa
Motor Data	
Motor Type	DC Brushless Motor
Max Power	7W
Physical Properties	
Ambient Temperature	5°C~40°C
Fluid Temperature	10°C~60°C
Material/Other	
Hose Suggest	ID4mm, OD6mm
Head of pump	PA66
Diaphragm	EPDM
Valve	EPDM
Noise	55dB
Lifetime	8000H
Dimension	75x31.1x60.4mm
Weight	200g



Features

Oil-free, self-priming, gas-liquid compatible, low noise, dry-running capable, compact size, low vibration, long service life.


Principle

Driven by a motor, the diaphragm reciprocates to create suction and discharge cycles through check valves for stable gas and liquid transfer. Chemical resistance.

Chemical Resistance

Customizable PPS pump head, PTFE diaphragm, and FFPM valves provide excellent resistance to corrosive gases and liquids.

Drawing(mm)

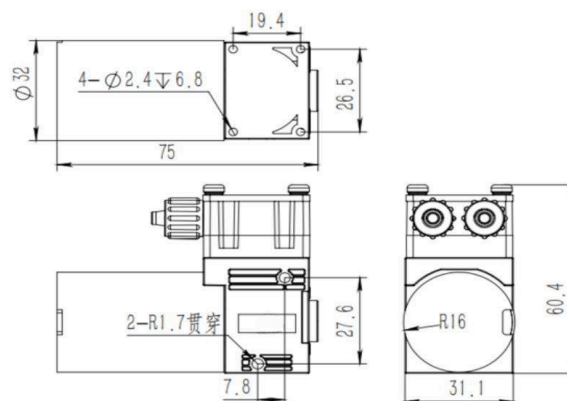

Installation & Usage Notes

1. Install a filter with a minimum filtration accuracy of $\leq 30 \mu\text{m}$ at the pump inlet to prevent particle ingress
2. Bottom mounting: 4x $\Phi 2.4$ mm holes (depth 6.8 mm), recommended to use M3 self-tapping screws for through-board fixation
3. Side mounting: 2xR1.7 mm through holes, use M3 screws for through-board installation and secure fixation

Application Fields

- Digital printing equipment
- Biochemical analyzers
- Microplate washing equipment
- Chemical analysis systems
- Liquid sampling devices
- Cleaning & Disinfection