

BD - 05TF Series - Micro Diaphragm Gas-Liquid Pump

Model:BD-05TF600W

Performance Data	
Model	BD-05TF600W
Voltage Option	6V/12/24V
Free Water Flow	600mL/min
Max Water Pressure	2.5bar
Water Pressure Head	>15m
Water Suction Head	7m
Free Gas Flow	4L/min
Max Gas Pressure	1bar
Max Gas Vacuum	-78kPa
Motor Data	
Motor Type	DC Brush Motor
Max Power	7W
Physical Properties	
Ambient Temperature	5°C~40°C
Fluid Temperature	10°C~60°C
Material/Other	
Hose Suggest	ID4mm, OD6mm
Head of pump	PA66
Diaphragm	EPDM
Valve	EPDM
Wet Material	PA+EPDM+EPDM
Noise	50dB
Lifetime	3000H
Dimension	82.6x31.1x58.1mm
Weight	200g



Features

Oil-free, self-priming, gas-liquid compatible, low noise, dry-running capable, compact size, low vibration, long service life.


Principle

Driven by a motor, the diaphragm reciprocates to create suction and discharge cycles through check valves for stable gas and liquid transfer. Chemical resistance.

Chemical Resistance

Customizable PPS pump head, PTFE diaphragm, and FFPM valves provide excellent resistance to corrosive gases and liquids.

Drawing(mm)

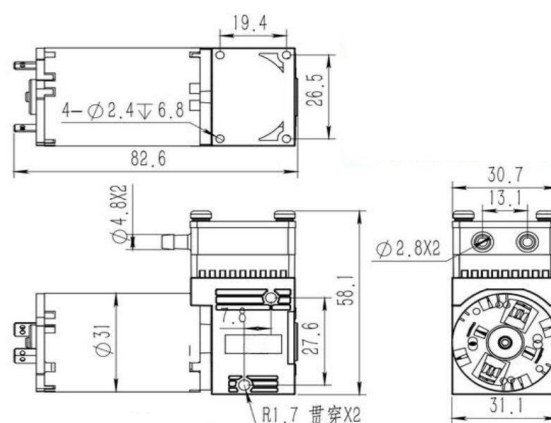

Installation & Usage Notes

1. Install a filter with a minimum filtration accuracy of $\leq 30 \mu\text{m}$ at the pump inlet to prevent particle ingress
2. Bottom mounting: 4x $\Phi 2.4$ mm holes (depth 6.8 mm), recommended to use M3 self-tapping screws for through-board fixation
3. Side mounting: 2xR1.7 mm through holes, use M3 screws for through-board installation and secure fixation

Application Fields

- Digital printing equipment
- Biochemical analyzers
- Microplate washing equipment
- Chemical analysis systems
- Liquid sampling devices
- Cleaning & Disinfection